


Chassis Type Monitor with Touch

12" / 15" / 17" / 19"

- ❑ LCD Panel size from 12" to 19"
- ❑ Resistive, Capacitive or SAW Touch
- ❑ USB and RS232 Dual Port available
- ❑ Speaker or Non speaker Choice
- ❑ Mounting Options :
 - 3 M compatible (Side)
 - VESA Standard (Back)
 - 75 x 75 mm & 100 x 100mm
- ❑ High Resolution & Brightness

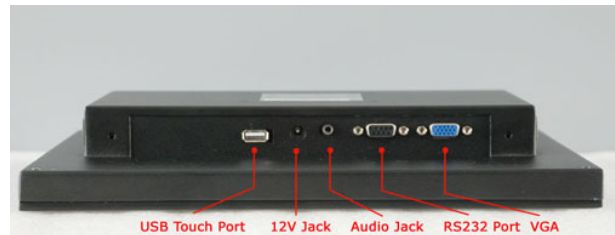

Applications:

The Monitors are supplied as Chassis Type unit and has multiple mounting options. They are ideal for applications in harsh environment such Production areas, kiosks, machines, cabinets, doors, construction vehicles etc...

Flexible Use:

The Industrial Monitors consist of very high quality. Depending on the customers application they can be even further adapted.

Standardly the Monitors are equipped with high resolution and very durable TFT Displays and Resistive Touch, SAW or Capacitive Touch.

Informationen & Angebot :

TecSys GmbH

Karl-Theodor-Str. 55
80803 Munich / Germany

Email: mark@tecsys.de

Internet: <http://www.tecsys.de>

Phone: +49 89 321 990 14

Fax: +49 89 307 21 65

Specification: T06-Chassis Type Series

Model Name:	T06-12OF	T06-15OF	T06-17OF	T06-19OF
LCD Panel	TFT Active Matrix LCD Display			
Resolution:	1024 x 768	1024 x 768	1280 x 1024	1280 x 1024
Brightness:	250 cd / m ²	250 cd / m ²	300 cd / m ²	300 cd / m ²
Contrast Ratio:	300 : 1	600 : 1	1000 : 1	1000 : 1
Band with:	135 MHz	108 MHz	135 MHz	135 MHz
Display Color:	12 M	16.7M	16.7M	16.7M
Pixel Pitch:	0.307x0.307 mm	0.297x0.297 mm	0.264x0.264 mm	0.294 x 0.294 mm
Response Time:	Tr/tf: 5/11 ms	Tr/tf: 2/6 ms	Tr/tf: 1.3/3.7 ms	Tr/tf: 1.3/3.7 ms
System Memory	H: 90° V: 65°	H: 160° V: 160°	H: 160° V: 160°	H: 178° V: 178°
Backlight Life	50,000 hours			
OSD features	Auto tune, Brightness, Contrast, Clock, Phase, H-position, V-position, Recall			
Input Signal	Analog RGB (VGA), DVI Optional			
Touch Technology	5 Wires Resistive, Capacitive, SAW			
Touch Interface	USB, RS232 or USB & RS 232 Dual Ports			
Touch Active Area (W/H)	246.0x184.5 mm ²	304.1x228.0 mm ²	337.92x270.3 mm ²	377.30x302.05 mm ²
Storage Conditions	0°C – 40°C (32°F-104°F) 10%-80% (No Condensation)			
Operating Environment	-20°C – 60°C (-4°F-140°F) 10%-90% (Non Condensation)			
Dimensions	350x48.5x250 mm	40x55.5x300m m	442x62x320m m	497x76x383m m
N.W / G.W	2.8 kg / 4.0 kg	5.0kg / 6.0kg	6.6kg / 7.5kg	7.5kg / 8.5kg
Touch Screen Type	Side:3M Compatible, Back: VESA 75x75mm, 100x100mm			
Power Consumption	<25W	<30W	<40W	<45W
Power Supply	Adapter Input 100-240V AC, 50-60Hz 1.5A; Adapter Output 12V DC, 4.16 A			
Warranty	One Year panel warranty, 2 Years Part and Labor Warranty			
Environment: EMC & Safety	FCC Class A, CD, LVD			

(Errors & Changes are reserved / Irrtümer & Änderungen vorbehalten)

March 1, 2010