


CM1855-WH Chassis-Mount Monitor 1920x1080

- **Modular mechanical design provides flexible product configuration and easy maintenance**
- **Optional built-in touch screen for interactive applications**
- **Optional auto-brightness sensor offers application by day and night**
- **Optional with different housing (Open Frame, Chassis Type, Panel Mount, Rack Mount etc.)**

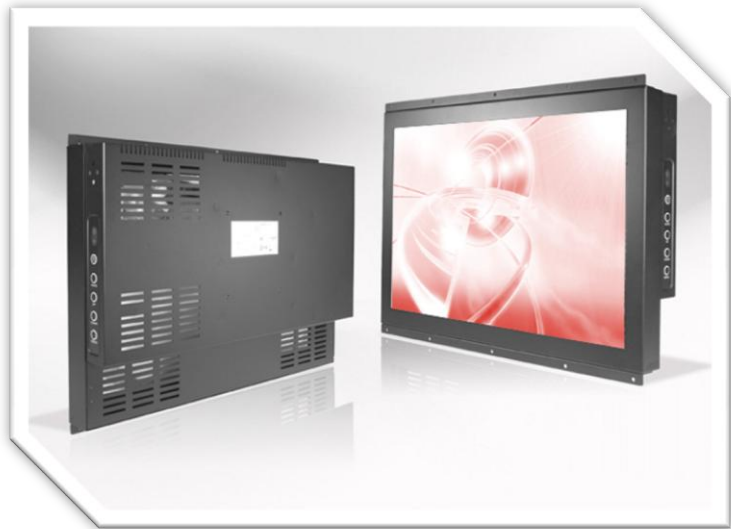

Specifications

Panel:	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating	
	Aspect Ratio / Size	Wide / 18,5" viewable diagonal area	
	Active Area / Pixel Pitch	408.96 (H) x 230.4 (V) / 0.231(H) x 0.231(V) mm	
	Native Res. / Colors	1920 (H) x 1080 (V) / 16.7 Million	
	Brightness / Contrast	350 cd/m2 (standard) / 1000:1	
	Response Time	< 20 ms	
	Viewing Angle	H. 178° (-89° ~ + 89°), V. 178° (-89° ~+ 89°)	
	Light Source	LED, Long Life 35.000 hrs (typ)	
Input Sources:	Audio System	2W Speaker x 2	
Input Terminals:	1 x VGA (15 Pin Female D-SUB) 1x PC Audio (Stereo headphone Jack) 1 x DC Power Plug		
Convenient Features:	Auto Calibration, Back Light Adjustment, Plug & Play (VESA DDC/CI, DDC 2B) OSD Multi Languages, Wall Mount Ready (VESA 75 x 75 mm)		
Power:	Internal power supply with universal / Auto-Sensing, AC 90 to 260 V, 50 / 60 Hz		
Power cons.	Operation / Power	18 watt, < 1 watt (Support DPMS)	
Operating:	Temperature / Humidity	-20°C ~ 70°C / 10% ~ 90% (no condensation)	
Storage:	Temperature / Humidity	-30°C ~ 80°C / 10% ~ 90% (no condensation)	
Dimensions:	Physical	Please refer to drawing	
	Carton	WxHxD = TBD	
Weight:	N.W. / G.W	6 kg / 7 kg	
Options:	Touch	Enhanced Panel	Others
	Resistive Touch Capacitive Touch SAW Touch	Protection Glass High Brightness Sunlight Readable	Digital Signage Motion Sensor Light Sensor Auto-Dimming SV+AV, DVI, HDMI etc.

Full-size drawing available on request!

