


## FCH1505 Full IP66 15" Chassis Monitor 1024x768

- Modular mechanical design provides flexible product configuration and easy maintenance
- Stainless Steel Enclosure
- Optional auto-brightness sensor offers application by day and night

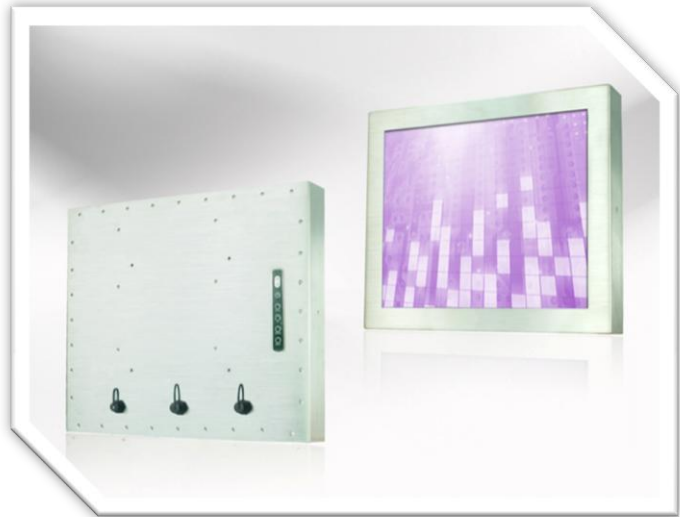

### Specifications

<b>Panel:</b>	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating	
	Aspect Ratio / Size	4:3 / 15" viewable diagonal area	
	Active Area / Pixel Pitch	304.12 (H) x 228.10.5 (V) / 0.297 (H) x 0.297 (V) mm	
	Native Res. / Colors	1024 (H) x 768 (V) / 16.2 M	
	Brightness / Contrast	250 cd/m <sup>2</sup> (typ) / 700:1	
	Response Time	< 35 ms	
	Viewing Angle	Horiz. 140° (-70° ~ + 65°), Vert. 120° (-60° ~+ 60°)	
	Light Source	LED, Long Life 35.000 hrs (typ)	
<b>Input Sources:</b>	Audio System	N/A	
<b>Input Terminals:</b>	1 x VGA , 1 x DC Power Plug		
<b>Convenient Features:</b>	Auto Calibration, Back Light Adjustment, Plug & Play (VESA DDC/CI, DDC 2B) OSD Multi Languages, Wall Mount Ready (VESA 75 x 75 mm )		
<b>Power:</b>	12 VDC in. External power supply with universal / Auto-Sensing, AC 90 to 260 V, 50 / 60 Hz		
<b>Power cons.</b>	Operation / Power	20 watt, < 2 watt (Support DPMS)	
<b>Operating Temp.:</b>	Temperature / Humidity	0°C ~ 50°C, 10% ~ 90% (no condensation)	
<b>Storage Temp.:</b>	Temperature / Humidity	-20°C ~ 60°C, 10% ~ 90% (no condensation)	
<b>Weight:</b>	N.W. / G.W	8.0 kg / 10.0 kg	
<b>Options:</b>	<b>Touch</b> Resistive Touch Capacitive Touch SAW Touch Infrared Touch	<b>Enhanced Panel</b> High Brightness Wide Temperature Sunlight Readable Protection Glass	<b>Others</b> Digital Signage Motion Sensor Light Sensor Auto-Dimming SV+AV, DVI, HDMI, DP

Errors and omissions excepted.

