


RM1205

Rack Mount Monitor 12"

- **Modular mechanical design provides flexible product configuration and easy maintenance**
- **Optional built-in touch screen for interactive applications**
- **Optional auto-brightness sensor offers application by day and night**
- **Optional with different frames (Open Frame, Chassis Type, Chassis Mount, Panel Mount)**

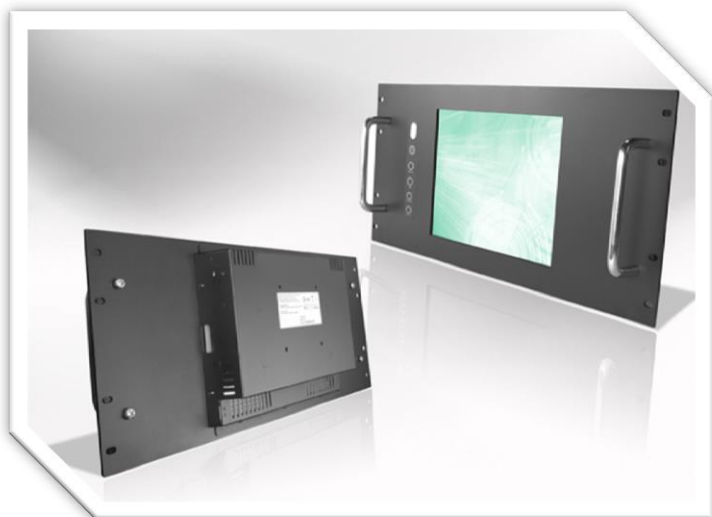

Specifications

| | | | |
|-----------------------------|--|---|---|
| Panel: | Cell Type / Glass Surface | TFT LCD / Black Anti-Glare, low reflection coating | |
| | Aspect Ratio / Size | 4:3 / 12,1" viewable diagonal area | |
| | Native Res. / Colors | RM1205-SN25L0 800 (H) x 600 (V) / 262 K | RM1205-XN35L0 1024 (H) x 768 (V) / 16.2 M |
| | Active Area / Pixel Pitch mm | 246.0 (H) x 184.5 (V) / 0.3075(H) x 0.3075(V) | 245.8 (H) x 184.3 (V) / 0.24(H) x 0.24(V) |
| | Response Time | < 35 ms | <25 ms |
| | Brightness / Contrast | 400 cd/m2 (typ) / 600:1 | 350 cd/m2 (typ) / 550:1 |
| | Viewing Angle | H. 140° (-70° ~ + 70°) V. 120° (-60° ~+ 60°) | H. 160° (-80° ~ + 80°) V. 140° (-70° ~ + 70°) |
| | Light Source | LED, Long Life 35.000 hrs (typ) | |
| Input Sources: | Audio System | 2W Amplifier | |
| Input Terminals: | 1 x VGA (15 Pin Female D-SUB) 1x PC Audio (Stereo headphone Jack) 1 x DC Power Plug | | |
| Convenient Features: | Auto Calibration, Back Light Adjustment, Plug & Play (VESA DDC/CI, DDC 2B) OSD Multi Languages, Wall Mount Ready (VESA 75 x 75 mm) | | |
| Power: | External AC-to-12VDC power adapter with universal / Auto-Sensing, AC 90 to 260 V, 50 / 60 Hz | | |
| Power cons. | Operation / Power | 22 watt, < 2 watt (Support DPMS) | 24 watt, < 2 watt (Support DPMS) |
| | | Temperature / Humidity 0°C ~ 50°C, 10% ~ 90% (no condensation) | |
| Operating: | Temperature / Humidity -20°C ~ 60°C, 10% ~ 90% (no condensation) | | |
| Storage: | Temperature / Humidity -20°C ~ 60°C, 10% ~ 90% (no condensation) | | |
| Dimensions: | Physical | WxHxD = 482 x 260 x 58 (mm) For 19" Rack 6U | |
| | Carton | WxHxD = TBD | |
| Weight: | N.W. / G.W | 4 kg / 5 kg | |
| Options: | Touch Resistive Touch Capacitive Touch SAW Touch Infrared Touch | Enhanced Panel High Brightness Wide Temperature Sunlight Readable Protection Glass | Others Digital Signage Motion Sensor Light Sensor Auto-Dimming SV+AV, DVI, HDMI |

