


ZCH101A(6)-WE30L2 Zero-Bezel Chassis Monitor 1280x800

- **Modular mechanical design provides flexible product configuration and easy maintenance**
- **Optional built-in touch screen for interactive applications**
- **Optional auto-brightness sensor offers application by day and night**
- **Optional signal inputs**
- **Optional Media-Player**



Specifications			
Panel:	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating	
	Aspect Ratio / Size	Wide / 10,1" viewable diagonal area	
	Active Area / Pixel Pitch	216.96 (H) x 135.6 (V) / 0.1695 (H) x 0.1695 (V) mm	
	Native Res. / Colors	1280 (H) x 800 (V) / 262 K	
	Brightness / Contrast	300 cd/m2 (typ) / 800:1	
	Response Time	< 16 ms	
	Viewing Angle	H. 160° (-80° ~ + 80°), V. 160° (-80° ~+ 80°)	
	Light Source	LED, Long Life 35.000 hrs (typ)	
Input Sources:	Audio System	2W Speaker x 2	
Input Terminals:	1 x VGA (Standard) 1x PC Audio (Stereo headphone Jack) 1 x DC Power Plug		
Convenient Features:	Auto Calibration, Back Light Adjustment, Plug & Play (VESA DDC/CI, DDC 2B) OSD Multi Languages, Wall Mount Ready (VESA see drawing)		
Power:	12 VDC in		
Power cons.	Operation / Power	9 watt, < 1 watt (Support DPMS)	
Operating Temp.:	Temperature / Humidity	0°C ~ 50°C, 10% ~ 90% (no condensation)	
Storage Temp.:	Temperature / Humidity	-20°C ~ 60°C, 10% ~ 90% (no condensation)	
Dimensions:	Physical	See drawing	
	Carton	WxHxD = TBD	
Weight:	N.W. / G.W	3.5 kg / 4.5 kg	
Options:	Touch	Enhanced Panel	Others
	Resistive Touch Capacitive Touch Protection Glass	High Brightness Wide Temperature Sunlight Readable Protection Glass	Digital Signage Motion Sensor Light Sensor Auto-Dimming SV+AV, DVI, HDMI, DP

Errors and omissions excepted

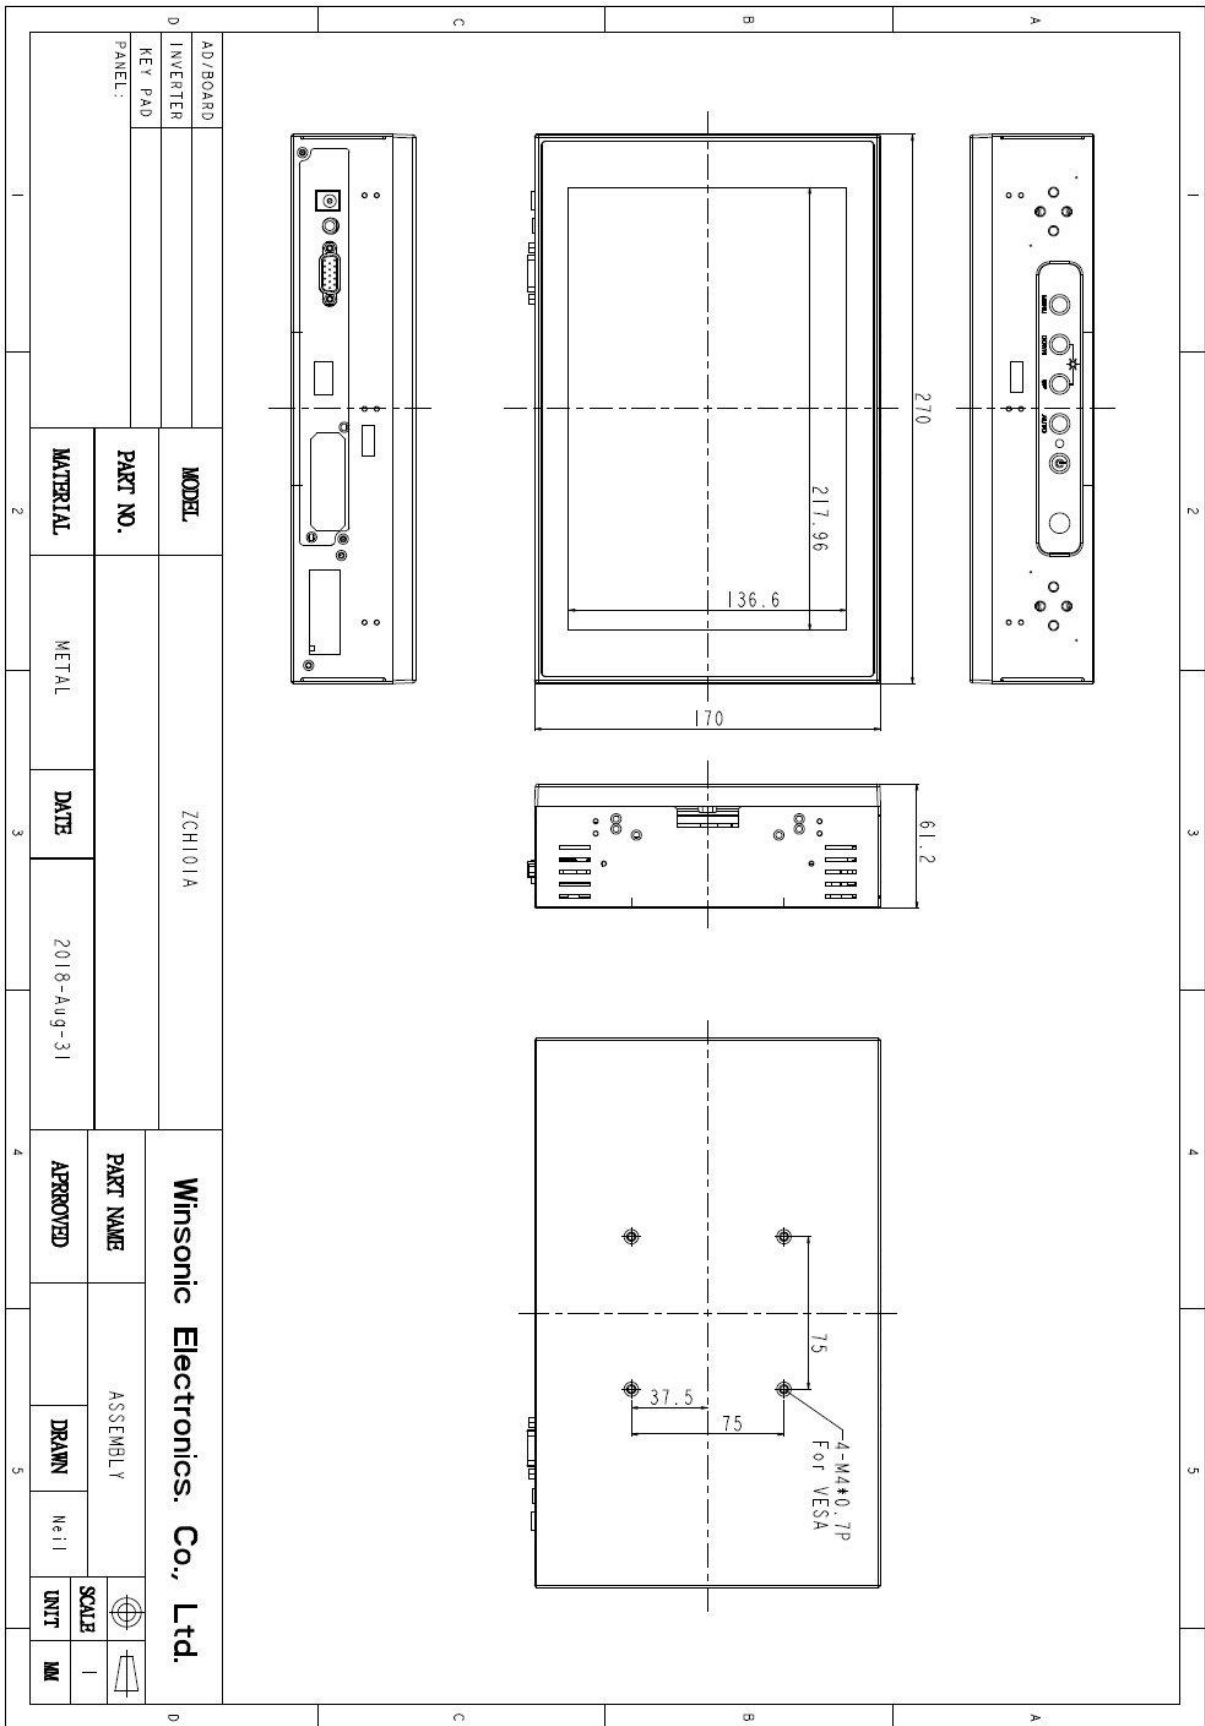

Full-size drawing available on request