


# SATA-CF adapter

- ❑ Adapter SATA to Compactflash in Desktop
- ❑ Supported media: Compactflash type I/II, Micro Drive
- ❑ Bootable and hot swappable Compactflash slot with fast SATA connection
- ❑ Low power and shock resistant
- ❑ Compactflash card can be the primary bootable device containing OS and applications
- ❑ Delivered with 3.5" bay frame and PCI bracket

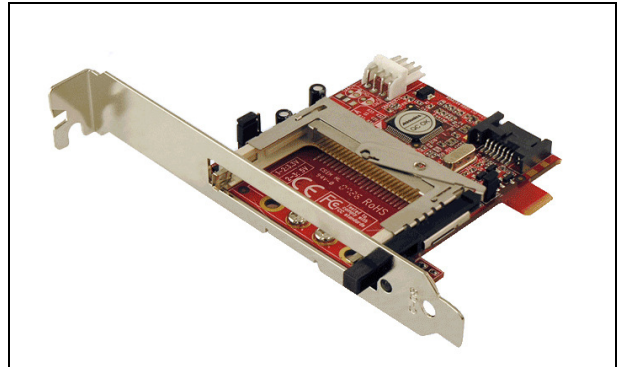

## Easy installation

The SATA-CF adapter can be mounted directly onto a PC with the PCI bracket or the 3.5" bay frame.

This SATA-CF adapter is one of the fastest CF Reader/Writer in the market today. Connect directly to the fast SATA port, this adapter supports direct booting\* from the Compactflash card as well as hot swapping\*\* of the Compactflash cards without re-starting the system.

The SATA-CF adapter can be installed practically into any system. The versatility and the fast performance of this adapter make it an ideal CF read/write device for many industrial PCs, embedded systems or various vertical applications.


## Notes on boot and swap function

\* While the SATA to CF Adapter is known to be bootable, only certain types of CF cards will be capable of booting off this adapter.


\*\* The hot swap function depends on the SATA controller. Some early SATA controllers do not support hot swap. Please confirm with your controller supplier.

## Mounting brackets


### ➤ ADSACFB

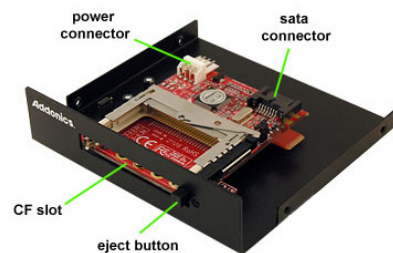

### ➤ ADSACFW

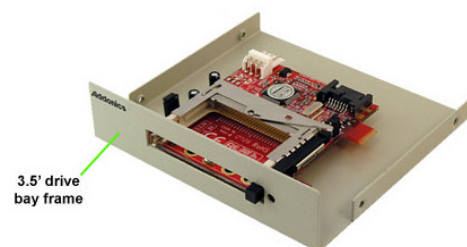

### ➤ ADSACF-N (without 3.5" bay bracket)

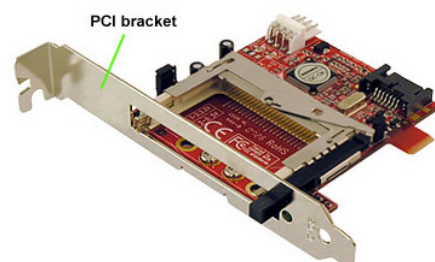

## Specification SATA-CF adapter

Item	SATA-CF adapter
Partnumbers	ADSACFB*, ADSACFW*, ADSACF-N*
Manufacturer	Addonics Technologies
Interface	SATA
Supported media	CF type I and II, Micro Drive
Maximum Read / Write speed	Depends on the media
Dimensions	<ul style="list-style-type: none"> <li>- Adapter (the control board only): 71 x 56 x 9 mm</li> <li>- 3.5" bay frame: 102 x 97 x 25 mm</li> </ul>
Power	+5V from PC power supply
Operating temperature	0°C to +75°C
Storage temperature	-40°C to +85°C
Humidity	5% - 95% (non condensing)
OS Support	DOS, Windows 3.1, NT, 98SE, ME, 2000, XP, Mac OS 8.6 or higher, Linux
Warranty	One year

### \* Package content:

- **ADSACFB**  
Content: SATA-CF adapter mounted in 3.5" drive bay metal frame (black color), 1x full height PCI bracket, 1x low profile PCI bracket, 1x power Y-cable, 1x 18" SATA data cable
- **ADSACFW**  
Content: same as ADSACFB, but the 3.5" drive bay metal frame is white
- **ADSACF-N**  
Content: SATA-CF adapter, 1x full height PCI bracket, 1x power Y-cable, 1x 18" SATA data cable

### Technical support:

#### TecSys GmbH

Karl-Theodor-Str. 55

80803 Munich

Germany

Email: [mark@tecsys.de](mailto:mark@tecsys.de)

Internet: <http://www.tecsys.de>

Phone: +49 89 321 990 14

Fax: +49 89 307 21 65