


FCH0846 Full IP66 8.4" Chassis Monitor 800 x 600

- Modular mechanical design provides flexible product configuration and easy maintenance
- Stainless Steel Enclosure
- Optional auto-brightness sensor offers application by day and night

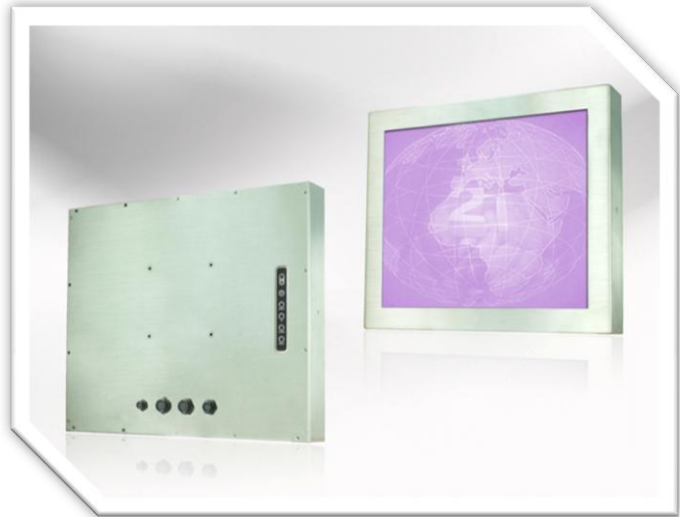

Specifications

Panel:	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating	
	Aspect Ratio / Size	4:3 / 8,4" viewable diagonal area	
	Active Area / Pixel Pitch	170.4 (H) x 127.8 (V) / 0.213 (H) x 0.213 (V) mm	
	Native Res. / Colors	800 (H) x 600 (V) / 262 K	
	Brightness / Contrast	350 cd/m2 (typ) / 400:1	
	Response Time	< 30 ms	
	Viewing Angle	Horiz. 160° (-80° ~ + 80°), Vert. 140° (-70° ~+ 70°)	
	Light Source	LED, Long Life 35.000 hrs (typ)	
Input Sources:	Audio System	N/A	
Input Terminals:	1 x VGA , 1 x DC Power		
Convenient Features:	Auto Calibration, Back Light Adjustment, Plug & Play (VESA DDC/CI, DDC 2B) OSD Multi Languages, Wall Mount Ready (VESA 75 x 75 mm)		
Power:	12VDC in. External AC-to-12VDC power adapter with universal / Auto-Sensing, AC 90 to 260 V, 50 / 60 Hz		
Power cons.	Operation / Power	9 watt, < 2 watt (Support DPMS)	
Operating Temp.:	Temperature / Humidity	0°C ~ 50°C, 10% ~ 90% (no condensation)	
Storage Temp.:	Temperature / Humidity	-20°C ~ 60°C, 10% ~ 90% (no condensation)	
Weight:	N.W. / G.W	5.0 kg / 7.0 kg	
Options:	Touch	Enhanced Panel	Others
	Resistive Touch Capacitive Touch SAW Touch Infrared Touch	High Brightness Wide Temperature Sunlight Readable Protection Glass	Digital Signage Motion Sensor Light Sensor Auto-Dimming SV+AV, DVI, HDMI, DP

Errors and omissions excepted

