

FCH1905 Full IP66 19" Chassis Monitor 1280x1024


- Modular mechanical design provides flexible product configuration and easy maintenance
- Stainless Steel Enclosure
- Optional auto-brightness sensor offers application by day and night



Specifications

Panel:	Cell Type / Glass Surface	TFT LCD / Black Anti-Glare, low reflection coating	
	Aspect Ratio / Size	5:4 / 19" viewable diagonal area	
	Active Area / Pixel Pitch	376.3 (H) x 301.1 (V) / 0.294 (H) x 0.294 (V) mm	
	Native Res. / Colors	1280 (H) x 1024 (V) / 16.7 M	
	Brightness / Contrast	250 cd/m ² (typ) / 800:1 (420 cd/m ² available too)	
	Response Time	< 5 ms	
	Viewing Angle	Horiz. 170° (-85° ~ + 85°), Vert. 160° (-80° ~+ 80°)	
	Light Source	LED, Long Life 35.000 hrs (typ)	
Input Sources:	Audio System	N/A	
Input Terminals:	1 x VGA , 1 x DC Power Plug		
Convenient Features:	Auto Calibration, Back Light Adjustment, Plug & Play (VESA DDC/CI, DDC 2B) OSD Multi Languages, Wall Mount Ready (VESA 100 x 100 mm)		
Power:	12 VDC In. External AC-to-12VDC power adapter with universal / Auto-Sensing, AC 90 to 260 V, 50 / 60 Hz		
Power cons.	Operation / Power	33 watt, < 2 watt (Support DPMS)	
Operating Temp.:	Temperature / Humidity	0°C ~ 50°C, 10% ~ 90% (no condensation)	
Storage Temp.:	Temperature / Humidity	-20°C ~ 60°C, 10% ~ 90% (no condensation)	
Weight:	N.W. / G.W	12.0 kg / 14.0 kg	
Options:	Touch	Enhanced Panel	Others
	Resistive Touch Capacitive Touch SAW Touch Infrared Touch	High Brightness Wide Temperature Sunlight Readable Protection Glass	Digital Signage Motion Sensor Light Sensor Auto-Dimming SV+AV, DVI, HDMI, DP

Errors and omissions excepted.

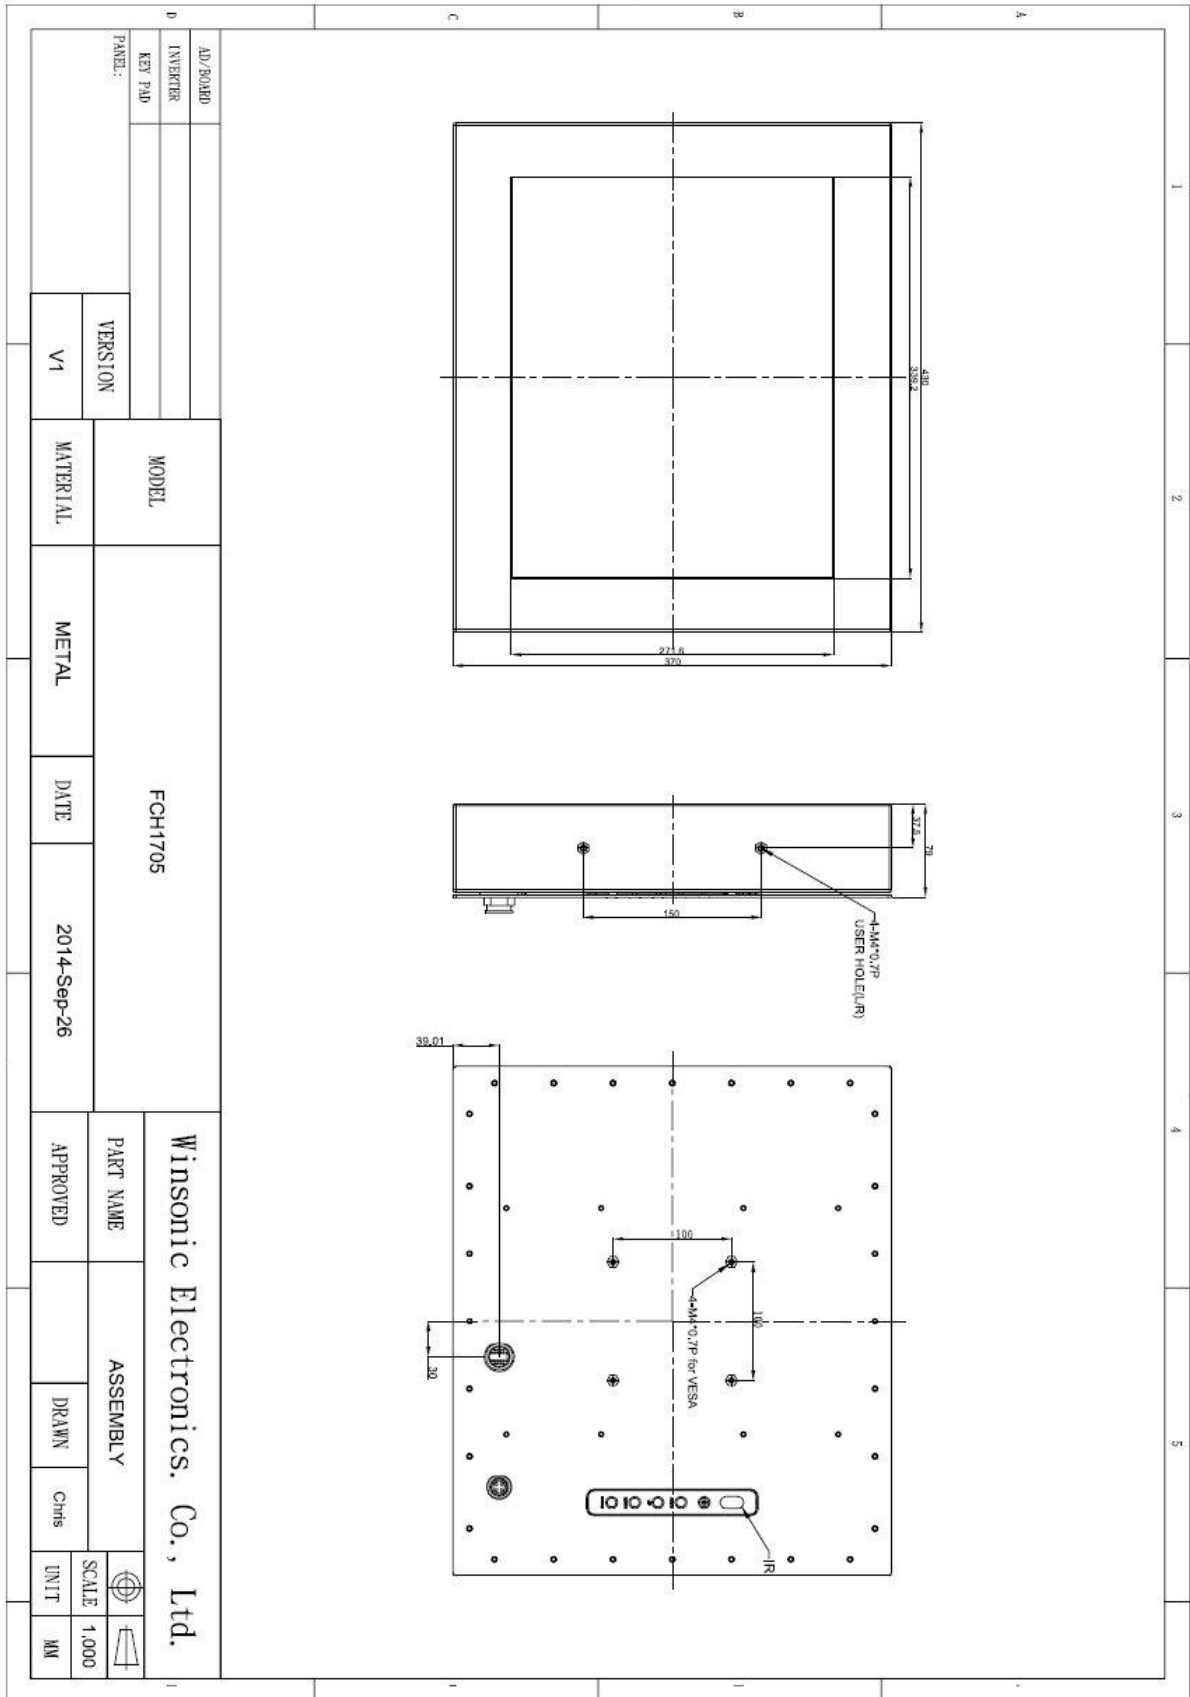

Full-size drawing available on request.